Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBOSTAR® GROUP

Supplier's address: GLOBOSTAR LED LIGHTING AND ACCESSORIES GROUP, 1st Km Old National

Road Katerinis-Thessalonikis 1, 60100 KATERINI KATERINI PIERIAS, EL

Model	identifier:	SKU: 90625
IVIOUCI	idelitiiei.	JNO. J0023

Type of	light	source:
---------	-------	---------

Light source cap-type WIRES - TER- (or other electric interface) WINAL BLOCK Mains or non-mains: NMLS Connected light N	DLS
(or other electric interface)	
Mains or non-mains: NMLS Connected light N	
source (CLS):	No
Colour-tuneable light source: No Envelope: -	-
High luminance light source: No	
Anti-glare shield: No Dimmable: Ye	'es


Product parameters


Product parameters						
Parameter		Value	Parameter	Value		
	General product parameters:					
- ·	nption in on- 00 h), rounded st integer	3	Energy efficiency class	E		
dicating if it refe a sphere (360°)	s flux (φuse), in- ers to the flux in , in a wide cone rrow cone (90º)	330 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode power (P _{on}), ex- pressed in W		3,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	50	Spectral power dis-	See image		
sions without	Width	83	tribution in the	in last page		
separate control gear, light-	Depth	83	range 250 nm to 800 nm, at full-load			

ing control parts and non-lighting control parts, if any (millimetre)					
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	30		
		Chromaticity coordi-	0,440		
		nates (x and y)	0,403		
Parameters for directional light sources:					
Peak luminous intensity (cd)	50	Beam angle in degrees, or the range of beam angles that can be set	30		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	12	Survival factor	0,95		
the lumen maintenance factor	0,92				

(a)_{'-'}: not applicable;

(b)_{'-'} : not applicable;

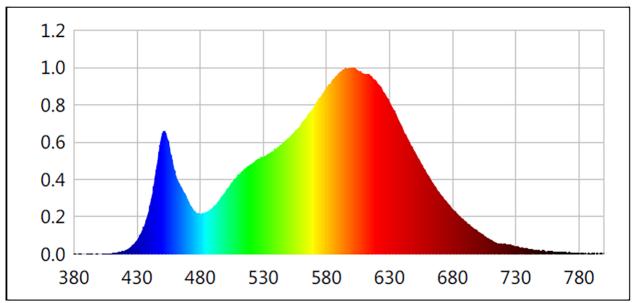

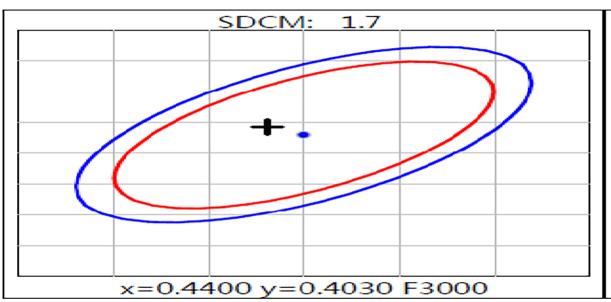

Model placed on the Union market from 24/06/2025.



EPREL registration number: 2314959 https://eprel.ec.europa.eu/qr/23

14959

Supplier: GLOBOSTAR GROUP SINGLE MEMBER P.C. (Impo Website: www.globostar.gr

rter)

Customer care service:

Name: GLOBOSTAR LED LIGHTING AND ACCESSORIES G Website: www.globostar.gr

ROUP

Email: eprel2021@globostar.eu Phone: 00306980878477

Address:

1st Km Old National Road Katerinis-Thessalonikis 1

60100 KATERINI

Greece